Electric Pallet Jack


CBD15

- Lithium battery capacity: 24V/20AH.
- Ergonomic handle with a bully switch.
- High-quality emergency switch (used as a key switch).
- Split rocker arm for even stress distribution, ensuring long-term use.
- Driving wheel with horizontal mounted motor, convenience to maintain.
- External battery charger connector allows separate charging even when the battery is fully depleted.
- Single fork roller.




Plug-in Battery

Model		CBD15
Drive type		Electric
Rated capacity/rated load	Q(lbs)	3300
Load centre distance	c (in)	23.6
Load distance, centre of drive axle to fork	x (in)	37.4/40.2
Wheelbase	y (in)	48.7/51.4
Service weight	lbs	251
Axle loading, laden front/rear	lbs	904/2654
Axle loading, unladen front/rear	lbs	187/64
Wheel type		Polyurethane
Tire size, front	(in)	Φ8.3*3
Tire size, rear	(in)	Φ3.1*3.6/3.1*2.7
Tread, rear	b11 (in)	15.3/20.6
Max. lift height	h3(in)	4.3
Height drawbar in driving position min./max.	h14(in)	25/47.2
Height, lowered	h13 (in)	3.0
Overall length	l1 (in)	62.2/65
Length to face of forks	l2 (in)	17
Overall width	b1/b2 (in)	21/27
Fork dimensions DIN ISO 2331	s / e / l (in)	2.1/6.3/45(48)
Fork spread	b5 (in)	21/27
ground clearance, centre of wheelbase	m2 (in)	1.1
Aisle width for pallets 40x48" crossways	Ast (in)	85.8/88.6
Aisle width for pallets 31x48" lengthways	Ast (in)	80.7/82.1
Turning radius	Wa (in)	54.3/57
Travel speed, laden/unladen	mph	2.67/2.8
Max. gradeability, laden/unladen	%	5/20
Service brake		Electromagnetic
Drive motor rating S2 60 min	kW	0.75
Lift motor rating at S3 15%	kW	0.5
Battery voltage/nominal capacity k5	V/Ah	24/20
Battery weight	lbs	10

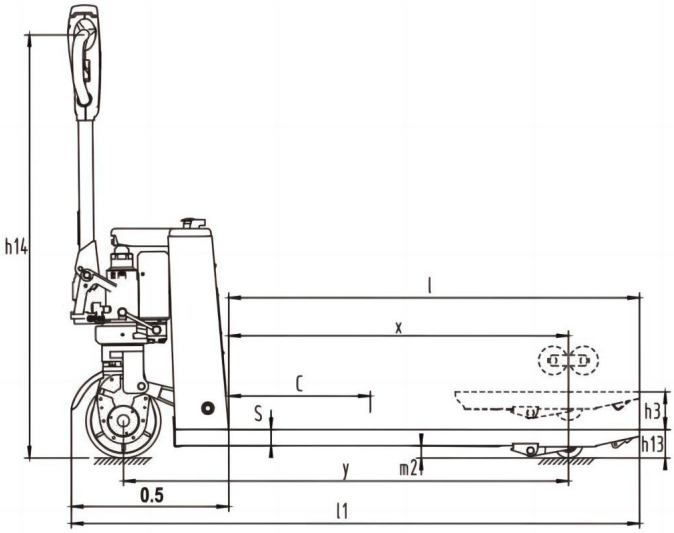

(inch)

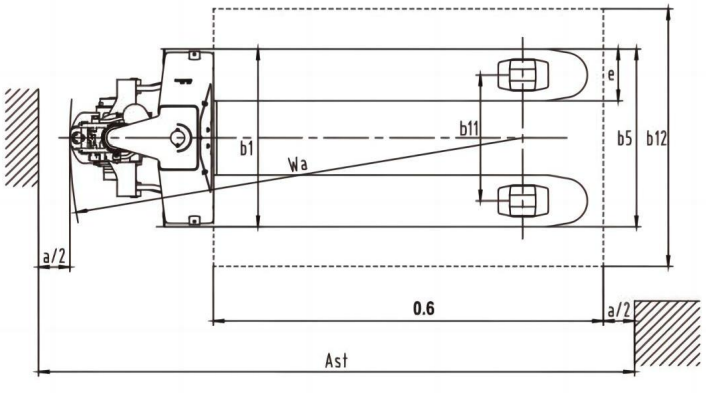

(inch)